

Theelin Hearth Products

# How To Replace the Door Gasket

# Table of Contents

1.	<b>How to replace the Door Gasket in the Parlour and Gnome Pellet Stove</b>	<b>3</b>
----	---	----------

# How to Replace the Door Gasket in the Parlour and Gnome Pellet Stove

## Step 1

**CAUTION: Unplug power cord prior to performing any service on stove. Ensure stove has cooled down.**

Open Door and gently lift up. The Door is affixed to the stove using (2) rivets with aluminum washers. By lifting straight up, the Door will come off the stove easily.



## Step 2


Gently lay Door down on cloth or non abrasive material with gasket side up.



## How to Replace the Door Gasket in the Parlour and Gnome Pellet Stove

### Step 3

Gently peel away old door gasket.

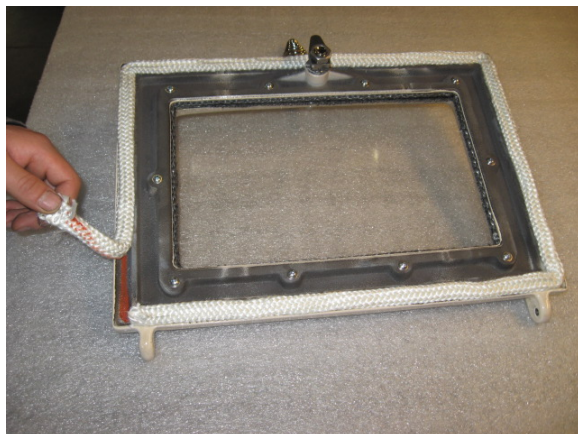

### Step 4

Once door gasket is removed, use scraper to remove old caulk from door gasket channel in Door.



### Step 5

Apply ¼" bead of high temperature silicone sealant all along the gasket channel in the door.




## How to Replace the Door Gasket in the Parlour and Gnome Pellet Stove

### Step 6


Starting in the bottom right hand corner, install new door gasket in channel working counter-clockwise.

**Note: do not stretch gasket as you install it.**

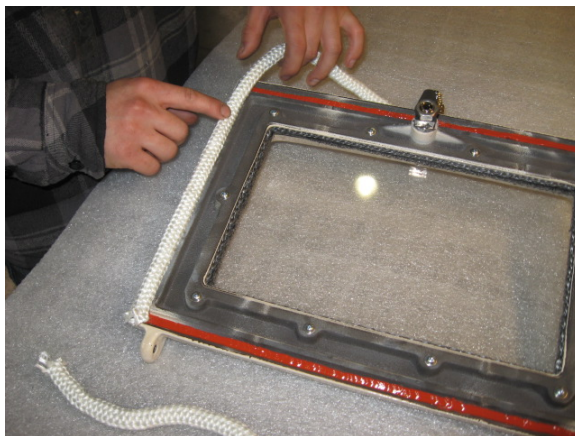

### Step 7

Cut excess gasket.

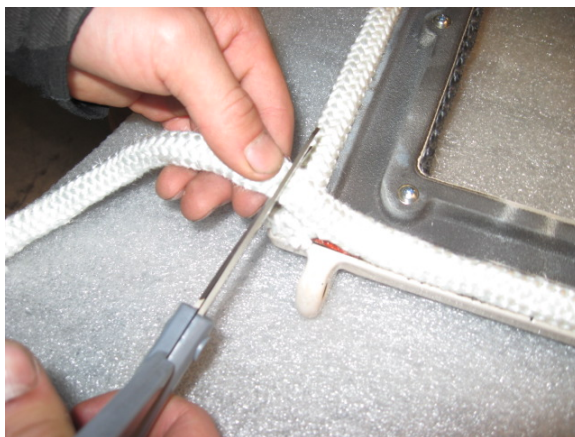

### Step 8

Lightly press gasket to seat it in channel and to allow for proper bond with high temperature adhesive.



## How to Replace the Door Gasket in the Parlour and Gnome Pellet Stove

### Step 9

Reinstall Door on stove. Do not close. Let adhesive set for 12 hours before closing door and applying pressure to gasket.

